




AW400SRx

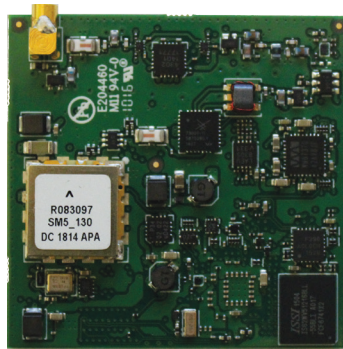

Actual size

DSP based OEM Radio Ultra Small (44x42 mm) receiver with Built-in wireless link Monitoring and Management Tools:

- Data Speed over the air 38400 bps at 25 kHz and 19200 bps at 12.5 kHz
- Advanced Forward Error Correction (FEC)
- UART serial interface with RTS/CTS flow control support
- Data Speed over the serial port 9600 to 115200 bps
- Testing, monitoring and control of the unit over the air
- AlphaWave SuperScan® - automatic search and select for best frequency/channel

The AW400SRx radio receiver provides a high-speed wireless data transfer at up to 38.4 kbps. Receiver supports user selectable modulation techniques (GMSK, 4FSK, DBPSK, DQPSK, D8PSK, or D16QAM), which allows the user to achieve the highest data speed for a given range. It also includes a selectable error correction, which improves the functioning of the radio link under interference.

AW400SRx can receive data from ArWest, Pacific Crest, and Satel transmitters. The unmatched features of radio include data scrambling, frequency hopping and low power consumption sleep modes.

AW400SRx supports two separate Application Data and Command modes of single UART serial port.

The built-in software tools provide the wireless link testing, units' status and error statistics monitoring as well as units' settings change over the air. The firmware of the AW400SRx radio modem resides in a flash memory. The updating of the radio modem programs is entirely software-based. The flash memory is re-programmable through an UART interface or over the air.

AW400SRx

Pinout AW400SRx

| Pin # | Signal name | I/O* | Description |
|--------|---------------|-------|--|
| 1 | EMU^ | O | Do not connect |
| 2 | TMS | I | Do not connect |
| 3 | VDDIO | Power | Do not connect |
| 4 | TCK | I | Do not connect |
| 5 | TDI | I | Do not connect |
| 6 | TRST^ | I | Do not connect |
| 7 | TDO | O | Do not connect |
| 8 | GND | - | Signal and Chassis Ground |
| 9 | PF12 | I/O | General-Purpose I/O |
| 10 | SP0_RX_DPRI | I | SPI Master Receive line |
| 11 | PF13 | I/O | General-Purpose I/O |
| 12 | SP0_TX_DPRI | O | SPI Master Transmit line |
| 13 | PF14 | I/O | General-Purpose I/O |
| 14 | SP0_FS | O | SPI Chip Select |
| 15 | PF15 | I/O | General-Purpose I/O |
| 16 | SP0_CLK | O | SPI Master Clock |
| 17..18 | Reserved | - | Do not connect |
| 19 | GND | - | Signal and Chassis Ground |
| 20 | 12.288MHZ | O | TCXO Clock Output signal |
| 21..22 | Reserved | - | Do not connect |
| 23 | I2C_SCL_EXT | O | I2C Serial Clock. An internal 4.7K pull-up |
| 24 | I2C_SDA_EXT | I/O | I2C Serial Data. An internal 4.7K pull-up |
| 25..26 | Reserved | - | Do not connect |
| 27 | UART0_TX-OUT | O | Serial Data Output |
| 28 | UART0_RX-IN | I | Serial Data Input |
| 29 | UART0_RTS-OUT | O | Request to Send. |
| 30 | UART0_DSR-IN | I | Data Set Ready. Control line can be used as a backup method for entering Command mode: (0V) – Maintenance Mode; (3.0V) – Data Mode An internal 47K pull-up enables Data Mode if this signal is left unconnected. Maintenance Mode is also accessible by transmitting an escape sequence. |
| 31 | UART0_DTR-OUT | O | Data Terminal Ready |
| 32 | UART0_CTS-IN | I | Clear to Send. An internal 47K pull-down enables data receive if this signal is left unconnected. |
| 33 | UART0_DCD-OUT | O | Data Carrier Detect. |
| 34 | TTL I-2 | I | Input line. An internal 47K pull-up resistor is applied. Reserved for future use |
| 35 | TTL O-1 | O | Output Line 1. Reserved for future use |
| 36 | TTL O-2 | O | Output Line 2. Reserved for future use |
| 37 | SLEEP-BOOT | I | consuming less than 0.2mA. An internal 15K pull-down wakes up the radio if this signal is left unconnected. At wake up, any user programmed configuration settings are refreshed from flash memory, clearing any temporary settings that may have been set: (3.0V) – Sleep Radio; (0V) – Wake Radio |
| 38 | RES_CONT | I | Reset the radio by shortening this pin to the ground. |
| 39..54 | GND | - | Signal and Chassis Ground |
| 55..70 | 3V6 | Power | Positive 3.6V...4.4V DC from ext. Power Supply. |
| 71..74 | GND | - | Signal and Chassis Ground |

* I/O Voltage Level = 3V

General Specification

- Input Voltage: 3.6-4.2 VDC
- Current (max): 0.5 A
- Operation Temperature: -40° C ... +60° C
- Storage Temperature: -40° C ... +80° C
- Dimensions: L: 44.2 mm x W: 45.5 mm x H: 7.4 mm
- Weight: 18.5 g

Features

- DSP-Modem
- Multi-Modulation Technologies
- Zero-IF Technologies
- Embedded Firmware Compensation for Operation and Extremely Low at High Temperatures
- Compact Design

External Connectors

- RF Connector (J401): MMCX RIGHT ANGLE PCB JACK.
Emerson Johnson p/n 135-3701-311 (285210)
- Main Connector (J101): 2x35, 0.4 mm, vertical, plug connector
Molex p/n 55909-0774 (285375)
- Mating part: 2x35, 0.4 mm, vertical, receptable connector
p/n 500913-0702 (285374)

Radio Transceiver Specifications

- Frequency Range: 406 - 470 MHz
- Channel Spacing: 25/20/12.5/6.25 kHz
- Carrier Frequency Stability: ± 1 ppm
- Modulation: GMSK/4FSK/DBPSK/DQPSK/D8PSK/D16QAM
- Communication Mode: Simplex
- Supported User Interface: Serial Asynchronous (TTL compatible)
- Supported Comms. protocols: Transparent Receiver

Radio Receiver Specifications

- Receiver Sensitivity for DBPSK (BER 1×10^{-4}):
 - 113 dBm for 25 kHz Channel Spacing
 - 113 dBm for 20 kHz Channel Spacing
 - 114 dBm for 12.5 kHz Channel Spacing
 - 114 dBm for 6.25 kHz Channel Spacing
- Receiver Sensitivity for DQPSK (BER 1×10^{-4}):
 - 110 dBm for 25 kHz Channel Spacing
 - 110 dBm for 20 kHz Channel Spacing
 - 111 dBm for 12.5 kHz Channel Spacing
 - 111 dBm for 6.25 kHz Channel Spacing
- Receiver Dynamic Range: -119 to -10 dBm


Modem Specification

- Interface DSP: UART (serial port)
- Data Speed of Serial Interface: 9600 - 115200 bps
- Data Rate of Radio Interface (25 kHz Channel Spacing):
 - 9600 bps – DBPSK/GMSK
 - 19200 bps – DQPSK
 - 28800 bps – D8PSK
 - 38400 bps – D16QAM
- Data Rate Radio Interface (20 kHz Channel Spacing):
 - 7500 bps – DBPSK/GMSK
 - 15000 bps – DQPSK
 - 22500 bps – D8PSK
 - 30000 bps – D16QAM
- Data Rate Radio Interface (12.5 kHz Channel Spacing):
 - 4800 bps – DBPSK/GMSK
 - 9600 bps – DQPSK
 - 14400 bps – D8PSK
 - 19200 bps – D16QAM
- Data Rate Radio Interface (6.25 kHz Channel Spacing):
 - 2400 bps – DBPSK
 - 4800 bps – DQPSK
 - 7200 bps – D8PSK
 - 9600 bps – D16QAM
- Forward Error Correction (FEC): Reed-Solomon Error Correction
- Data scrambling: Yes

AW400SRx

AW400SRx. Bottom view

Dimensions are in mm

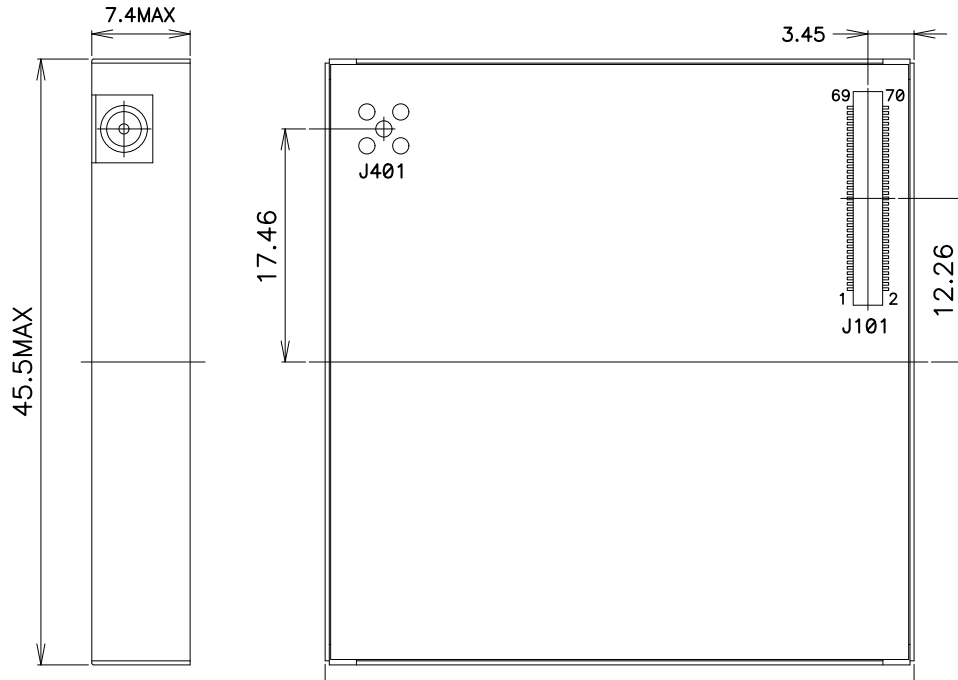

Specifications are subject to change without notice



JAVAD GNSS
www.javad.com
Rev.1.0 September 14, 2016

